






431W

Drive position, Regional and Urban

APPLICATION

Extra-deep traction tyre for long tread life without sacrificing retreadability. The unique block pattern offers excellent traction and prevents block-punching under various conditions.

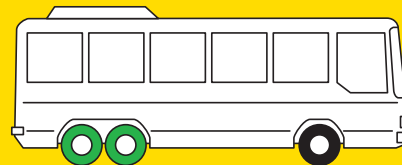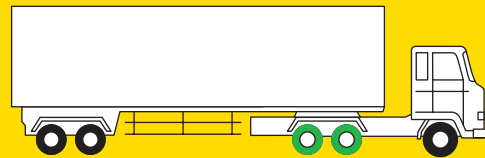

● Recommended

Tyre Size	Ply Rating	Load Index	Speed Index	TL or TT	Overall Diameter (mm)	Section Width (mm)	Maximum load per tyre. Single (kg)	Maximum load per tyre. Dual (kg)	Maximum Pressure (Kpa)	Recommended Rim (J)	Tread Depth (mm)
315/80R22.5	18	154/150	M	TL	1080,4	316	3750	3350	825	9	20,2



Dunlop Tyres SA

Request-A-Quote at www.dunloptyres.co.za



The information contained in this information sheet/insert is for information purposes only. Sumitomo Rubber South Africa (Pty) Ltd has acted in good faith to provide an accurate publication. However, to the maximum extent permitted by law, Sumitomo Rubber South Africa (Pty) Ltd, its affiliates, officers, employees, agents and advisors do not make any warranty, express or implied, as to the accuracy, reliability or completeness of the information in this newsletter or that the information is suitable for your intended use and disclaim all responsibility and liability for the information (including, without limitation, liability for negligence).

The intellectual property rights presented in this publication – such as brands, trademarks (logos) or patents – are the property of Sumitomo Rubber South Africa (Pty) Ltd. Nothing in this publication should be construed as granting any license or right to use and enjoyment of the same. Use of said intellectual property rights is prohibited in the absence of express written consent of Sumitomo Rubber South Africa (Pty) Ltd. All text, images, graphics and other materials in this publication are subject to copyright and other intellectual property rights held by Sumitomo Rubber South Africa (Pty) Ltd and may not be modified, copied or used in any other way for commercial purposes or distribution.